

Ref. RA.ISO30.M2020	Mini-mesh grating, RA ISO30M2020
---------------------	----------------------------------

Grating made according to ASTM D2583-07 standards; ASTM D790-07e1; ASTM D638-08; ASTM G154-06; ISO 4589-2.


The amount of reinforcement material is 30% to 35% of the total weight.

The standard resin is isophthalic type with fire retardant - IFR 25 resin.

Fire spread degree ≤ 25 by ASTM E-84.

All products have UV inhibitor and antioxidant additive

PROPERTIES	VALUES
H	30,00 mm
A	40,00 mm
B	20,00 mm
C	13,00 mm
E	7,00 mm
F	5,00 mm
Weight (theoretical)	18,00 Kg/m ²
Open surface	42,00 %
H	30,00 mm

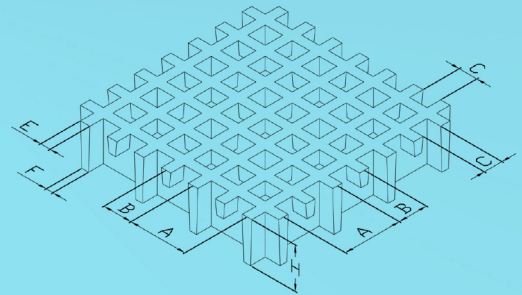

SURFACE TYPE	AVAILABILITY
G - Sand (silice)	Usually in stock
C - Concave	Usually in stock
S - Lisa	By order